


# DISTORTION MEASUREMENT

input level: 0 dBV

source output impedance: 400 Ohm

load at the AVC/TVC output: 27 kOhm

*icOn's low frequency distortion is very good, 2-10 times lower than a 7 times more expensive, award winner Made In Japan AVC preamp's distortion.*

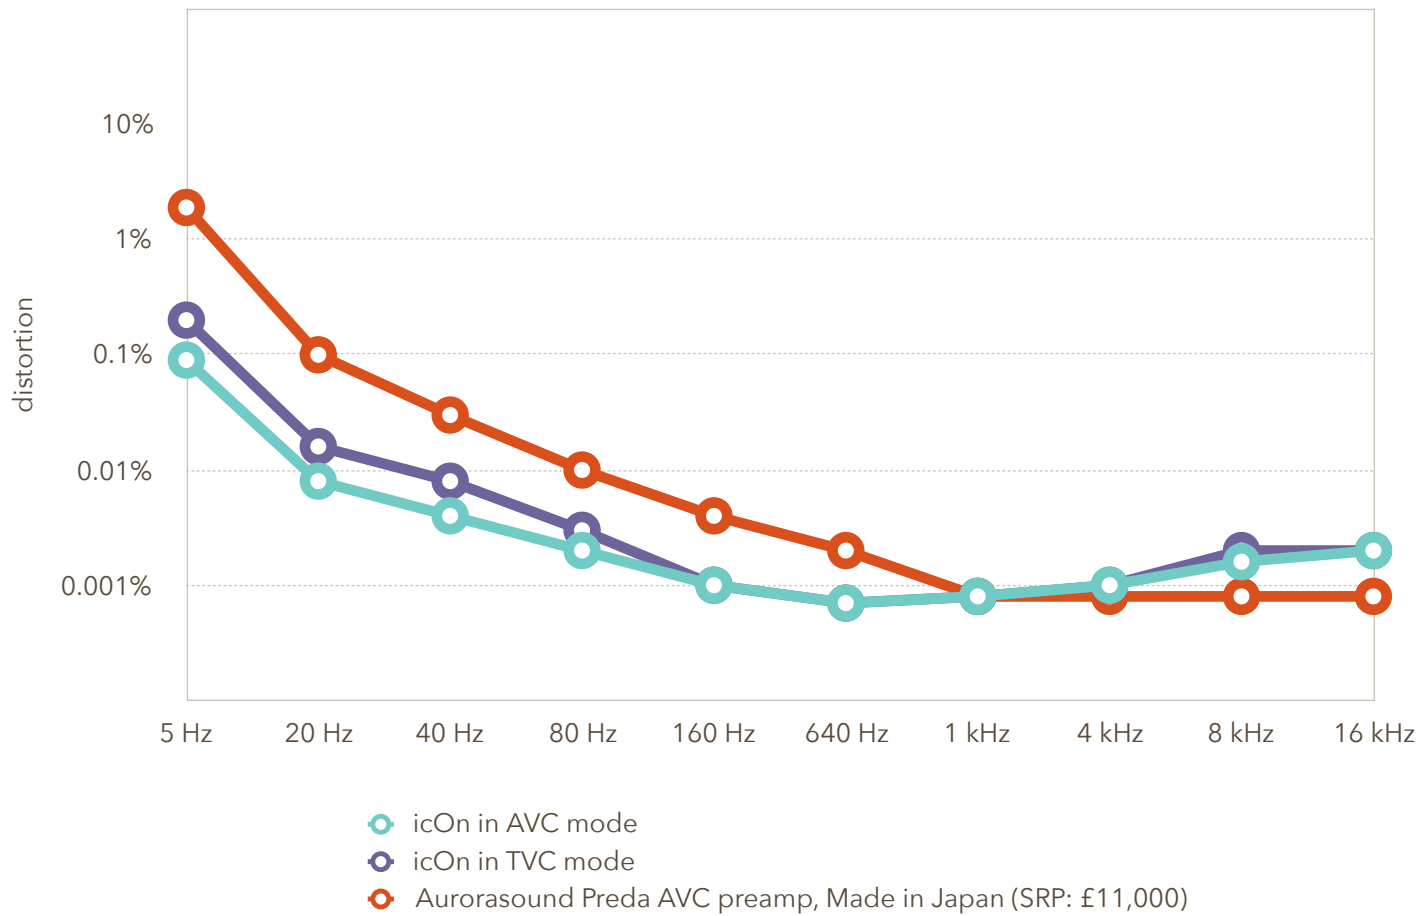

DISTORTION IN %

Frequency	icOn in AVC mode	icOn in TVC mode	Aurorasound Preda AVC preamp, Made in Japan (SRP: £11,000)
5 Hz	0.09%	0.2%	1.9%
20 Hz	0.008%	0.016%	0.1%
40 Hz	0.004%	0.008%	0.03%
80 Hz	0.002%	0.003%	0.01%
160 Hz	0.001%	0.001%	0.004%
640 Hz	0.0007%	0.0007%	0.002%
1 kHz	0.0008%	0.0008%	0.0008%
4 kHz	0.001%	0.001%	0.0008%
8 kHz	0.0016%	0.002%	0.0008%
16 kHz	0.002%	0.002%	0.0008%